



RoHS Compliant

Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

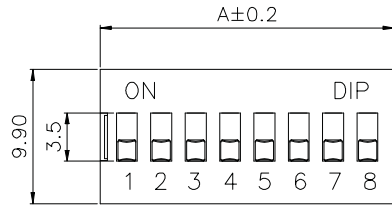


SECTION A-A


NOTES:

MATERIAL



- . Base: UL94V-0 PBT plus glass fiber reinforced.
Color: Black
- . Cover: UL94V-0 PBT plus glass fiber reinforced.
Color: Red,Black,Blue
- . Actuators: UL94V-0 PBT plus glass fiber reinforced.
Color: White
- . Contact: Phosphor bronze with 3 micro inches gold plating over nickel
- . Top seal: Polyester film
- . Potting material: Epoxy

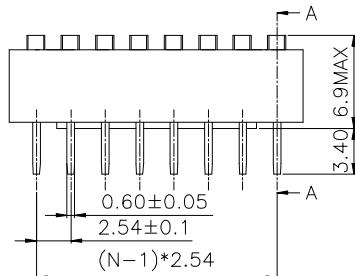

N: Number of contacts/2



订购方式/HOW TO ORDER

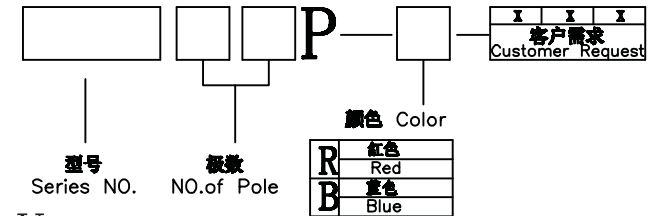

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

N=No. of contacts

Dimension

Position	DIM.A(mm)
2	6.64
3	9.18
4	11.72
5	14.2
6	16.8
7	19.34
8	21.88
9	24.42
10	26.96
12	32.04

Contact Us

TEL:+86-574-63510149

FAX:+86-574-63516735

E-Mail:Sales@cxsuteng.com

Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	DS-2.54
.X	±0.20	.X°	±2°	角法 VIEW	第一角	设计 DESIGN	No.06	产品料号 PART NO.	DS-2.54
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	DS-2.54
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 APPD	AO		DS-2.54