



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

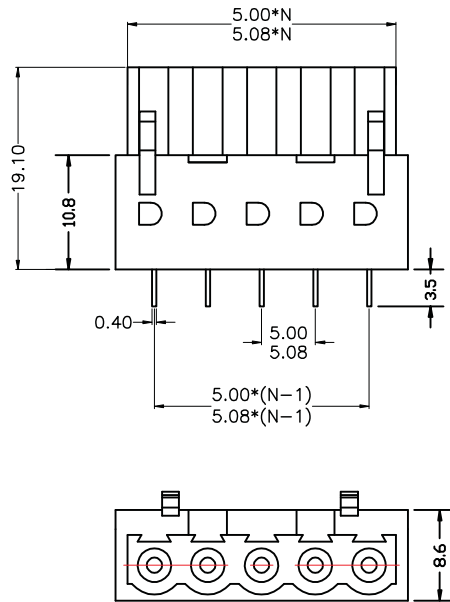

·材质及电镀(Material)
 焊针(Pin header):黄铜,镀锡(Brass,Tin plated)
 塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 15A
 接触电阻(Contact Resistance): 20mΩ
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
 耐电压(Withstanding Voltage): AC2000V/1Min

·机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

订购方式/HOW TO ORDER

P

型号 Series NO. 极数 NO.of Pole 间距 Pitch 颜色 Color

1	单间距 Single Pitch	1	灰色 Grey
2	双间距 Double Pitch	2	蓝色 Blue
		3	黑色 Black
		4	绿色 Green
		5	橙色 Orange
		6	红色 Red
		7	透明 Transparent
		8	黄色 Yellow
		9	白色 White

客户需求 Customer Request

Contact Us

TEL:+86-574-63510149 FAX:+86-574-63516735
 E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

N=No.of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X*	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGB-5.0/5.08
.X	±0.20	.X*	±2°	角法 VIEW	第三角	设计 DESIGN	No.06	产品料号 PART NO.	ST2EDGB-5.0/5.08
.XX	±0.15	.XX*	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST2EDGB-5.0/5.08
.XXX	±0.02	.XXX*	±0.5°	日期 DATE	2012.07.10	版本 APPD	A0		