
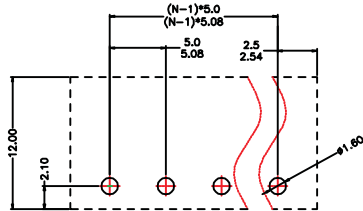





RoHS Compliant

Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



PCB LAYOUT(RECOMMENDED)  
(TOP VIEW TOL. :±0.05)

N=No.of contacts

**SPECIFICATION**

**MATERIAL**

Housing:PA66,UL94V-0

Pin Header:Brass,Tin Plated

**ELECTRICAL**

Rated voltage:300V


Rated current: 15A

Withstanding voltage: AC4000V/ 1Min

**MECHANICAL**

Operating Temperature:-40°C~+105°C

**订购方式/HOW TO ORDER**

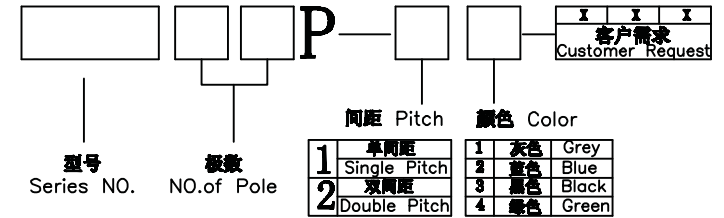

**Contact Us**

TEL:+86 - 574-63510149

FAX:+86-574-63516735

E-Mail:Sales@cxsuteng.com

Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGR-5.0/5.08
.X	±0.20	.X°	±2°	角法 VIEW	⊕	设计 DESIGN	No.06	产品料号 PART NO.	ST2EDGR-5.0/5.08
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST2EDGR-5.0/5.08
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 VER	A0		
						核准 APPD			