RoHS Compliant | Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

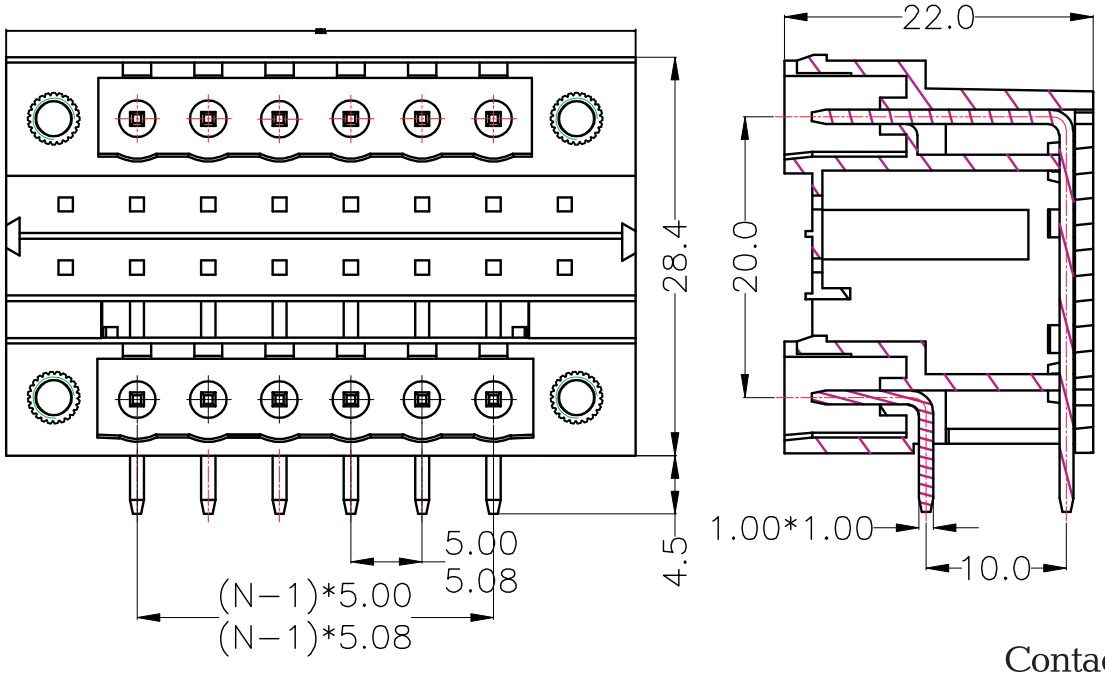

·材质及电镀(Material)
焊针(Pin header):黄铜,镀锡(Brass,Tin plated)
塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)
额定电压(Rated Voltage): 300V
额定电流(Rated Corrent): 15A
接触电阻(Contact Resistance): 20mΩ
绝缘电阻(Insulation Resistance): 5000MΩ/1000V
耐电压(Withstanding Voltage): AC2000V/1Min

·机械性能(Mechanical)
温度范围(Temperature Range): -40℃～ +105℃
瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

订购方式/HOW TO ORDER

[ ] [ ][ ] P — [ ] [ ] — [X][X][X] 客户需求 Customer Request

型号 Series NO.

极数 NO.of Pole

间距 Pitch

1	单间距	Single Pitch
2	双间距	Double Pitch

颜色 Color

1	灰色	Grey
2	蓝色	Blue
3	黑色	Black
4	绿色	Green

N=No.of contacts

Contact Us

TEL:+86－574－63510149 FAX:+86－574－63516735
E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGRHM-5.0/5.08
.X	±0.20	.X°	±2°	角法 VIEW		设计 DESIGN	No.06		
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST2EDGRHM-5.0/5.08
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012. 07. 10	版本 VER	A0	校准 APPD		图号 DRAW NO.	ST2EDGRHM-5.0/5.08