




RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



**SPECIFICATION**

**MATERIAL**




Housing: PA66, UL94V-0  
 Screw: M3 Steel, Zinc Plated  
 Terminal: Phosphor Bronze, Tin Plated  
 Clamp: Brass, Ni Plated

**ELECTRICAL**


Rated voltage: 300V  
 Rated current: 15A  
 Wire Range (AWG/MM<sup>2</sup>): 24-12AWG/0.2-2.5MM<sup>2</sup>  
 Withstanding voltage: AC4000V/1Min

**MECHANICAL**

Torque: 0.4Nm (3.5Lb-In.)  
 Strip Length: 7mm  
 Operating Temperature: -40°C~+105°C

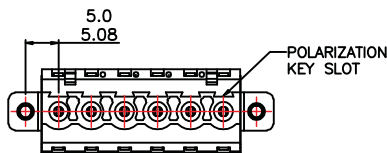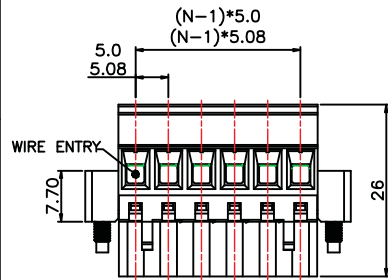

**订购方式/HOW TO ORDER**

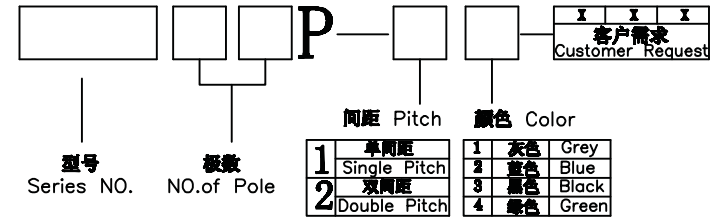

**Contact Us**

TEL: +86 - 574 - 63510149

FAX: +86 - 574 - 63516735

E-Mail: Sales@cxsuteng.com

Website: www.cxsuteng.com

N = No. of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X*.	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST2EDGKAM-5.0/5.08
.X	±0.20	.X*.	±2°	角法 VIEW	第一角法	设计 DESIGN	No.06	产品编号 PART NO.	ST2EDGKAM-5.0/5.08
.XX	±0.15	.XX*.	±1°	比例 SCALE	1:1	审核 CHKD		图号 DRAW NO.	ST2EDGKAM-5.0/5.08
.XXX	±0.02	.XXX*.	±0.5°	日期 DATE	2012.07.10	版本 APPD	AO		ST2EDGKAM-5.0/5.08