

RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

SPECIFICATION

MATERIAL



Housing:PA66,UL94V-0
 Screw:M1.5 Steel,Zinc Plated
 Terminal:Phosphor Bronze,Tin Plated
 Clamp:Brass,Ni Plated

ELECTRICAL


Rated voltage:125V
 Rated current:4A
 Wire Range(AWG/MMF):28-20AWG/0.5MMF
 Withstanding voltage: AC1250V/1Min

MECHANICAL

Torque:0.1Nm(0.9Lb-In.)
 Strip Length:7-8mm
 Operating Temperature:-40°C~+105°C

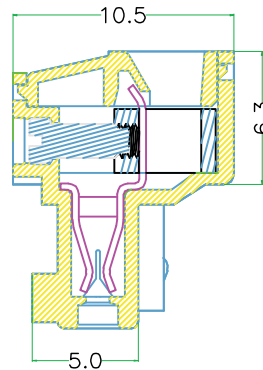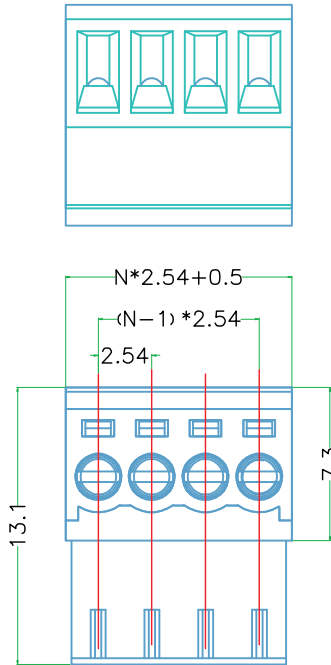

订购方式/HOW TO ORDER

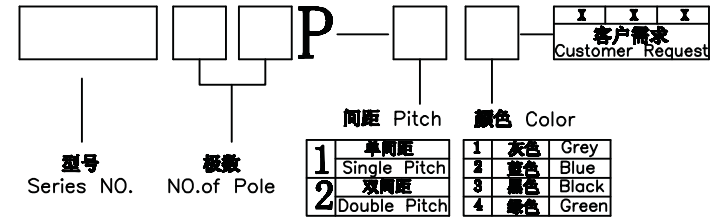

Contact Us

TEL:+86-574-63510149

FAX:+86-574-63516735

E-Mail:Sales@cxsuteng.com

Website:www.cxsuteng.com

N=No.of contacts

公差一览表				慈溪市速腾电子有限公司					
TOLERANCE UNLESS OTHERWISE				SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位	mm	制图	No.01	产品名称	ST15EDGK-2.54
.X	±0.20	.X°	±2°	UNIT		DRAWING		NAME	
.XX	±0.15	.XX°	±1°	角法	角法	设计	No.06	产品料号	ST15EDGK-2.54
.XXX	±0.02	.XXX°	±0.5°	VIEW	1:1	审核		PART NO.	
日期	2012.07.10	版本	A0	SCALE	1:1	核准		图号	ST15EDGK-2.54
DATE		VER		APPD				DRAW NO.	