


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN



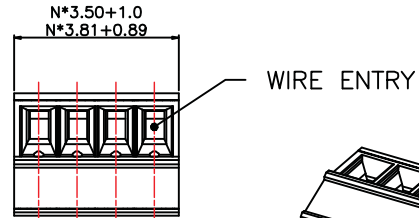


SPECIFICATION

MATERIAL
 Housing:PA66,UL94V-0
 Screw:M2 Steel,Zinc Plated
 Terminal:Phosphor Bronze,Tin Plated
 Clamp:Brass,Ni Plated



ELECTRICAL
 Rated voltage:300V
 Rated current: 8A
 Wire Range(AWG/MM²):28-16AWG/0.5-1.5MM²
 Withstanding voltage: AC2000V/ 1Min

MECHANICAL
 Torque:0.2Nm(1.7Lb-In.)
 Strip Length:7mm
 Operating Temperature:-40°C~+105°C

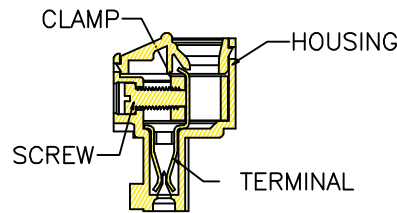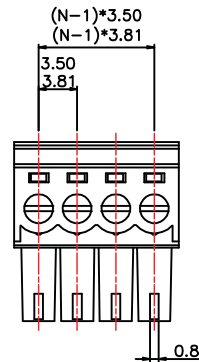

订购方式/HOW TO ORDER

			P			X X X 客户需求 Customer Request
型号 Series NO.	极数 NO.of Pole		间距 Pitch Single Pitch Double Pitch	颜色 Color		
			1 单间距 Single Pitch	1 灰色 Grey	2 蓝色 Blue	3 黑色 Black
			2 双间距 Double Pitch	4 绿色 Green		

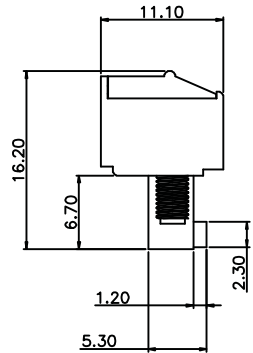

N=No.of contacts

Contact Us

TEL:+86 - 574-63510149 FAX:+86-574-63516735
 E-Mail:Sales@cxsuteng.com Website:www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST15EDGK-3.5/3.81
.X	±0.20	.X°	±2°	角法 VIEW	第三角	设计 DESIGN	No.06		
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHKD		产品料号 PART NO.	ST15EDGK-3.5/3.81
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	批准 APPD		图号 DRAW NO.	ST15EDGK-3.5/3.81