
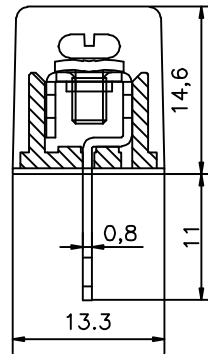
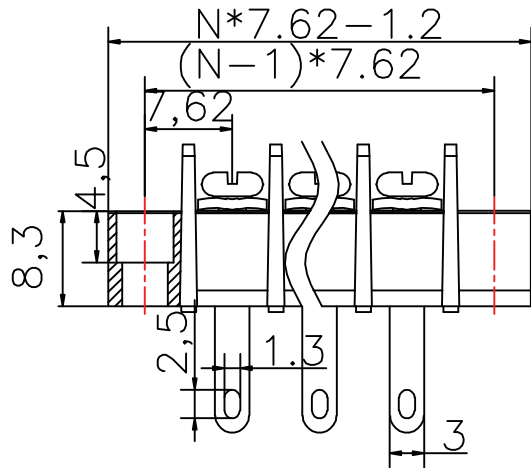



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

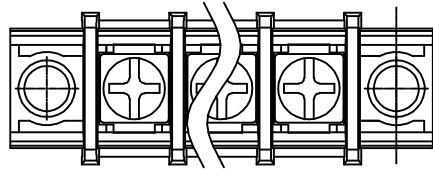

- 材料及电镀(Material)**  
 塑件(Housing): PA66, UL94V-0  
 端子(Terminal): 黄铜, 0.7: 镀锡(Brass, Tin Plated)  
 螺丝(Screw): M3, 钢, 镀锌(Steel, Ni-Plated)
- 电气性能(Electrical)**  
 额定电压(Rated Voltage): 300V  
 额定电流(Rated Current): 20A  
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V  
 耐电压(Withstanding Voltage): AC2000V/Min
- 机械性能(Mechanical)**  
 温度范围(Temperature Range): -40℃~ +105℃  
 适用线径(Wire Range): 22-14AWG  
 最大扭矩值(Max. Torque Value): 0.5N.m 4.4Lb.in

订购方式/HOW TO ORDER

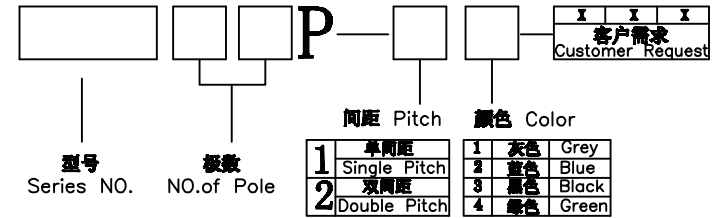

Contact Us

TEL: +86 - 574 - 63510149      FAX: +86 - 574 - 63516735  
 E-Mail: Sales@cxsuteng.com      Website: www.cxsuteng.com

N = No. of contacts

公差一览表				慈溪市速腾电子有限公司					
TOLERANCE UNLESS OTHERWISE				SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位	mm	制图	No.01	产品名称	ST25H-7.62
.X	±0.20	.X°	±2°	角法	∠	设计	No.06	图号	
.XX	±0.15	.XX°	±1°	比例	1:1	审核			产品料号
.XXX	±0.02	.XXX°	±0.5°	版本	A0	核准		图号	
日期	2012.07.10			版本	AO	核准		图号	ST25H-7.62
DATE				VER		APPD		DRAW NO.	