

RoHS Compliant

Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

·材质及电镀(Material)


焊针(Pin header):黄铜,镀锡(Brass, Tin plated)
 塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)


额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 16A
 接触电阻(Contact Resistance): 20mΩ
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
 耐电压(Withstanding Voltage): AC1500V/1Min

·机械性能(Mechanical)

温度范围(Temperature Range): -40℃~+105℃
 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)

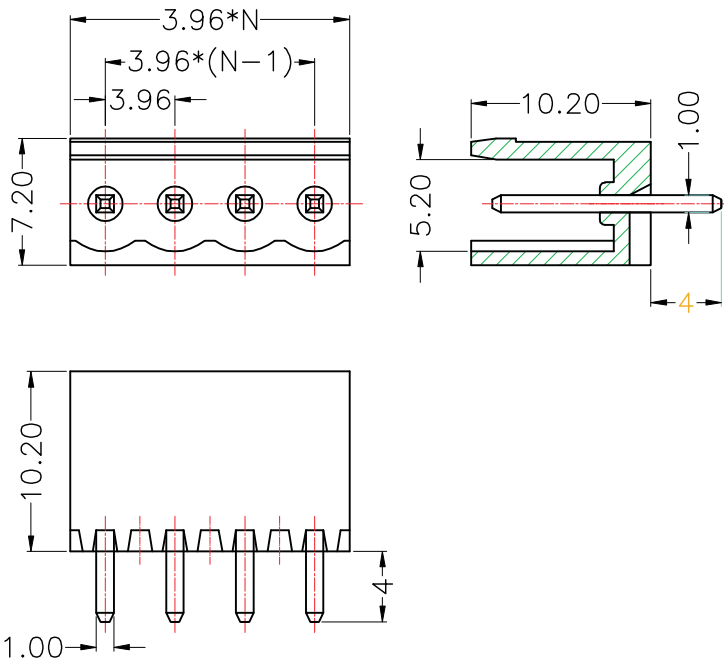

订购方式/HOW TO ORDER

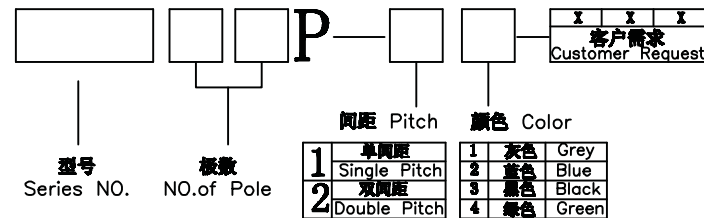

Contact Us

TEL:+86-574-63510149

FAX:+86-574-63516735

E-Mail:Sales@cxsuteng.com

Website:www.cxsuteng.com

N=No.of contacts

公差一览表				慈溪市速腾电子有限公司					
TOLERANCE UNLESS OTHERWISE				SUTOWN CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X*	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 NAME	STHT396V-3.96
.XX	±0.20	.X*	±2°	角法 VIEW	⊕	设计 DESIGN	No.06	产品编号 PART NO.	STHT396V-3.96
.XXX	±0.15	.XX*	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	STHT396V-3.96
日期 DATE	±0.02	.XXX*	±0.5°	版本 VER	A0	核准 APPD			STHT396V-3.96