


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

·材料及电镀 (Material)
 铜片 (Copper) 242, 铜 (Steel, zinc Plate)
 焊片 (Wire Protectors): 磷青铜, 镀锡或不锈钢
 (Phosphor bronze, Ni plated or stainless steel)
 焊料 (Tin leads): 共晶, 镀锡 (Eutectic, Tin plate)
 覆层 (Coating): 2466, UL94V-0


·电气性能 (Electrical)
 额定电压 (Rated Voltage): 300V
 额定电流 (Rated Current): 16A
 接触电阻 (Contact Resistance): 20mΩ
 绝缘电阻 (Insulation Resistance): 500MΩ/1000V
 耐电压 (Withstanding Voltage): AC1500V/1Min
 使用寿命 (Wire Range): 24-18AWG 1mm²

·机械性能 (Mechanical)
 温度范围 (Temperature Range): -40℃~+105℃
 瞬时温度 (MAX Switching): +230℃, 5秒 (5 Seconds)
 扭矩 (Torque): 0.23Nm (1.7lb.in)
 引脚长度 (Strip length): 4.5-5mm

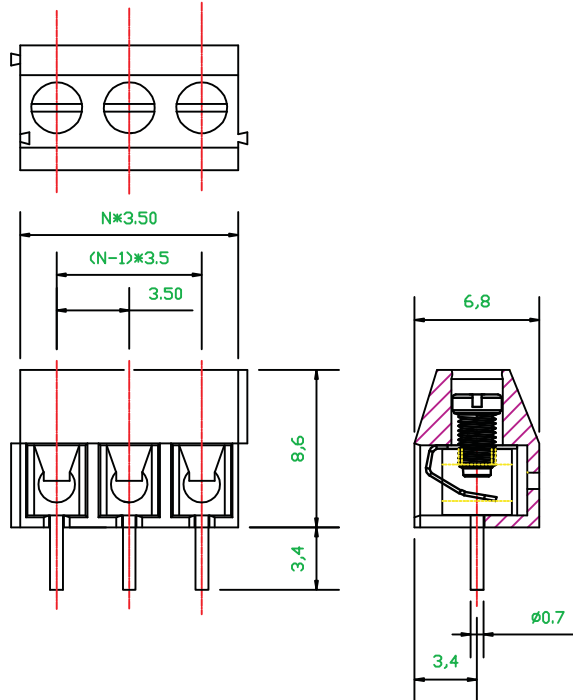

N=No. of contacts

订购方式 / HOW TO ORDER

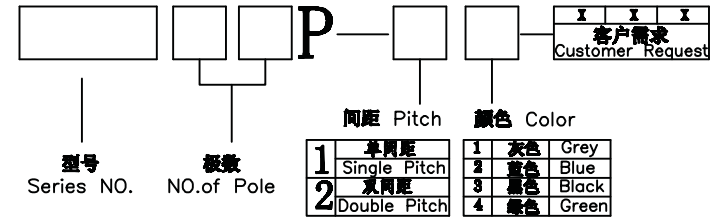

Contact Us

TEL: +86 - 574 - 63510149 FAX: +86 - 574 - 63516735
 E-Mail: Sales@cxsuteng.com Website: www.cxsuteng.com

公差一览表 TOLERANCE UNLESS OTHERWISE				慈溪市速腾电子有限公司 CIXI SUTENG ELECTRONIC CO., LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	No.01	产品名称 TITLE	ST350V-3.5
.X	±0.20	.X°	±2°	角法 VIEW	第三角	设计 DESIGN	No.06	产品料号 PART NO.	ST350V-3.5
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	ST350V-3.5
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 APPD	AO		